
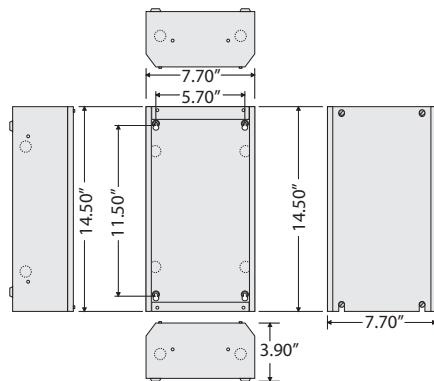


## AC POWER SUPPLY

### CTRL-PS

40 VA Power Supply, 120 to 24 Vac, DIN rail and 14.5" x 7.7" x 3.9" Enclosure

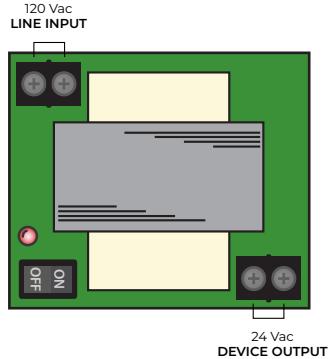

## SPECIFICATIONS

Transformer	One 40 VA
Primary	120 Vac
Secondary	24 Vac, isolated
Frequency	50/60 Hz
Overload Protection	Inherently Limited
Status	LED On = Activated
ON/OFF Switch	2 Position
Operating Temperature	-30 to 140° F
Humidity Range	5 to 95% (noncondensing)
Approvals	Class 2 (UL Approved UL5085-3), UL916, C-UL, CE, RoHS (PSMN40AS) UL916, C-UL, CE, RoHS (MH1000 Series)
Dimensions	14.50" D x 7.70" W x 3.90" D
Origin	Made of US and non-US parts
Housing	NEMA 1 Metal Enclosure with screw cover

## GREAT FOR ZONE & NETWORK CONTROLLERS

### NOTES

Track mounted power supply may be ordered separately as model PSMN40AS.

40 VA power supply mounted in MT212-4 track, high/low voltage barrier and 8.75" of 35 mm top hat DIN rail for mounting of desired controller in one metal enclosure.

Controller must be 9.50" x 6.75" x 3.50" or smaller with DIN rail mounting capability, or 9.50" x 6.75" x 3.125" without DIN rail mounting capability.

**Controller not included.**