


AC & DC POWER SUPPLY

PSH100A100AB10-DC

Enclosed Dual Power Supplies, 100 VA, 120 to 24 Vac and 120 to 24 Vdc @ 2.5 Amp, Class 2

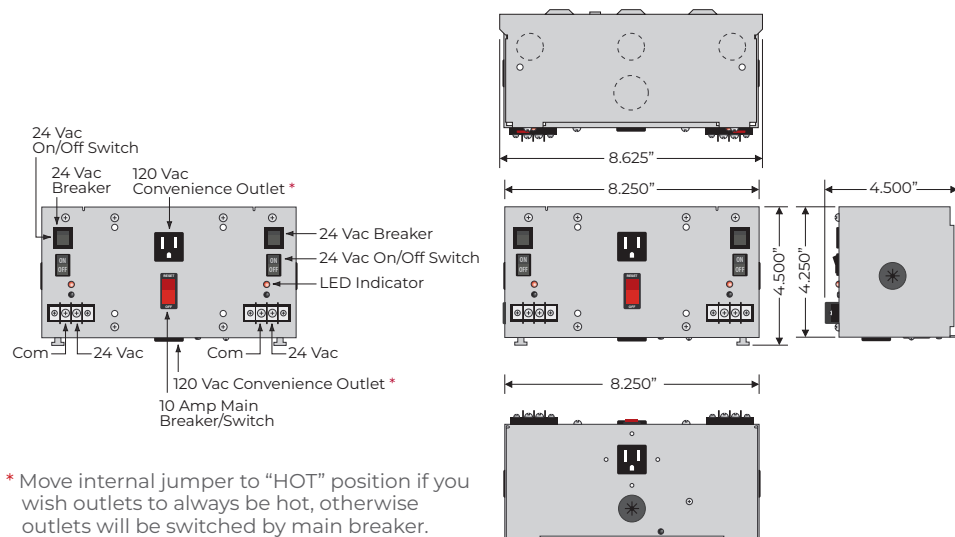

* Move internal jumper to "HOT" position if you wish outlets to always be hot, otherwise outlets will be switched by main breaker.



SPECIFICATIONS

Over Current Protection	Circuit Breaker	Input Wires	<u>Input Power Wires</u> BLK: 120 Vac WHT: Neutral GRN: Ground
Frequency	50/60 Hz		
24 Vac ON/OFF	On / Off Switch & Breaker		
24 Vdc ON/OFF	On / Off Switch & Breaker		
Main Breaker ON/OFF	Switch / Breaker (10 Amp) (Kills power to entire unit: Outlets, Aux. Output, 24 Vac, & 24 Vdc)* Total Combined Output 9A		<u>Outlet Wires</u> BLK: 120 Vac WHT: Neutral GRN: Ground
Max. Ambient Temperature	40° C		
Approvals	Class 2 (UL Approved UL5085-3), UL508, C-UL, CE, RoHS, FCC	Output Wires	<u>Auxiliary Output</u> BLU: 120 Vac
Dimensions	4.500" H x 8.625" W x 4.500" D	Origin	Made of US and non-US parts

NOTE

Output derating may exceed 20% due to elevated ambient temperature or heat buildup in device over time.