


AC POWER SUPPLY

PSH100AB10-EXT2


Single 100 VA Power Supply, 120 Vac to 24 Vac, UL Class 2,
10 Amp Main Breaker with Extension Cord, Metal Enclosure



PLUGS DIRECTLY INTO WIRED OUTLET BOX FOR USE ABOVE FALSE CEILINGS OR IN CONTROL PANELS

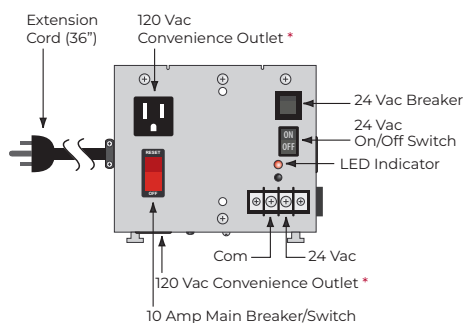

* Move internal jumper to "HOT" position if you wish outlets to always be hot otherwise outlets will be switched by main breaker.

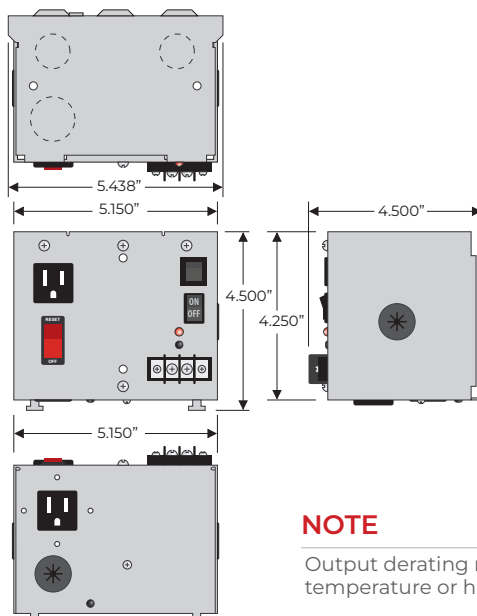

NOTE

Output derating may exceed 20% due to elevated ambient temperature or heat buildup in device over time.

SPECIFICATIONS

Transformer	One 100 VA Split-Bobbin
Over Current Protection	Circuit Breaker
Frequency	50/60 Hz
24 Vac ON/OFF	On / Off Switch & Breaker
Main Breaker ON/OFF	Switch / Breaker (10 Amp) Kills power to entire unit: Outlets, Aux. Output, & Transformer*
Max. Ambient Temperature	40° C
Dimensions	4.500" H x 5.438" W x 4.500" D

Approvals	Class 2 (UL Approved UL5085-3), UL916, C-UL, CE, RoHS
Origin	Made of US and non-US parts
Input Wires	<u>Power Cord</u> BLK: 120 Vac WHT: Neutral GRN: Ground
Output Wire	<u>Auxiliary Load Output</u> BLU: 120 Vac 9 Amp, max.