


UNINTERRUPTIBLE POWER SUPPLY KIT

PSH600-UPS

600VA UPS Backup Power Control Center, 12" x 14" x 6" Metal Enclosure

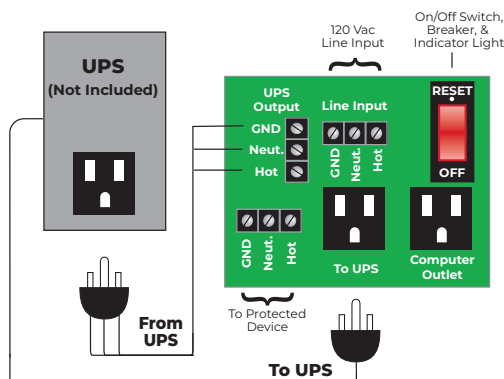

Shown With Cover



Shown Without Cover



SPECIFICATIONS


UPS

UPS: 600VA
Backup Time: 2.5 Min. @ Full 600 VA Load
10 Min. @ 1/2 Load
Power Consumption: Up to 3 Amp @120 Vac
Max Load: 330 Watt
Frequency: 50/60 Hz
UPS Temperature Rating: 32 to 104° F
UPS Transfer Time: 6ms
Approvals: UL Listed, UL1778

PSH2RB10

Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Main Breaker ON/OFF: Switch / Breaker (10 Amp)
Approvals: UL Listed, UL916, C-UL, CE, RoHS
Dimensions: 12.000" H x 14.000" W x 6.000" D
Metal Housing with Screw Cover
Origin: Made of US and non-US parts

ESTIMATED BACKUP TIME VS. LOAD

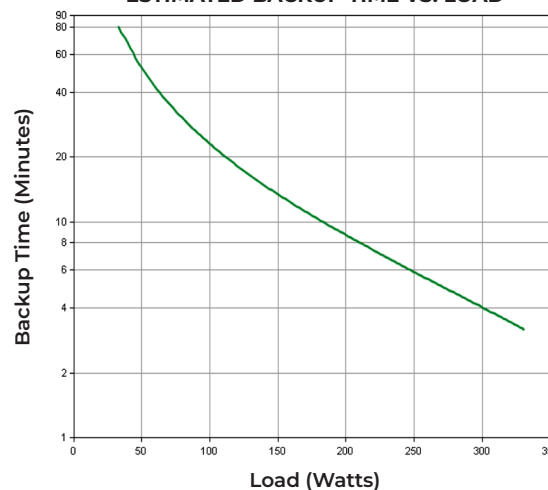

Notes:

To order without UPS, so that any other commercial UPS with appropriate ratings and within housing space limitations may be used, see model PSH2RB10.

To order interface board for replacement or for separate use, order model PSMN2RB10.

Average battery life: 3-5 years depending on the number of discharge cycles and environmental temperature

UPS may change based on quality and availability