


DC POWER SUPPLIES: 24 VAC TO 1.5 - 28 VDC




PSM24A24DAS

DC Power Supply, Isolated Linear, 24 Vac to 1.5-28 Vdc, 300mA Adjustable Output, Track Mount

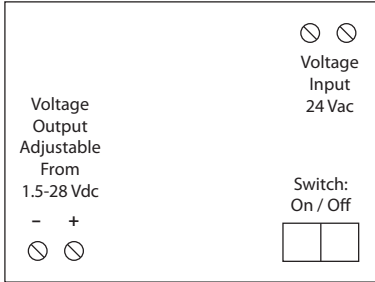

PSM19A24DAS

DC Power Supply, Isolated Linear, 120 Vac to 1.5-28 Vdc, 300mA Adjustable Output, Track Mount

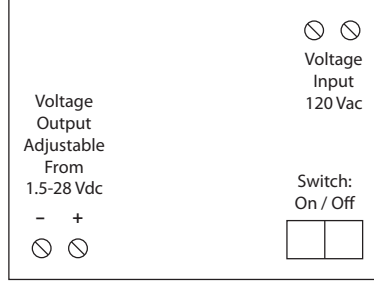

SPECIFICATIONS

- Voltage Input:** 24 Vac (PSM24A24DAS)
120 Vac (PSM19A24DAS)
 - Voltage Output:** 1.5 - 28 Vdc Isolated
 - Frequency:** 50/60 Hz
 - Overload Protection:** Electrical and Thermal, Auto-Reset
 - Operating Temperature:** -30 to 140° F
 - Humidity Range:** 5 to 95% (noncondensing)
 - Power Status:** LED On = Activated
 - Dimensions:** 2.75"H x 4.00"W x 1.75"D1/2.25"D2
 - Housing Detail:** See **Housing H** in housing guide for dimensions
 - Origin:** Made of US and non-US parts
 - Track Mount:** 4.000" and 2.750"
MT212-4 Mounting Track Supplied
 - ON/OFF Switch:** 2 Position
 - Max. Ambient Temperature:** 40° C (PSM19A24DAS)
 - Approvals:** Class 2, UL916, C-UL, CE, RoHS,
- Output Current Ratings:**
116 mA @ 10 Vdc
125 mA @ 12 Vdc
300 mA @ 24 Vdc
 - Input Current Rating:**
950 mA Maximum (PSM24A24DAS)
150 mA Maximum (PSM19A24DAS)
 - Percent Ripple:**
0.0016%, 24 Vdc @ 300 mA
 - Regulation:**
Load: 0.04% No Load to Full Load
Line: 0.0080 mV/V (PSM24A24DAS)
Line: 0.6250 mV/V (PSM19A24DAS)