
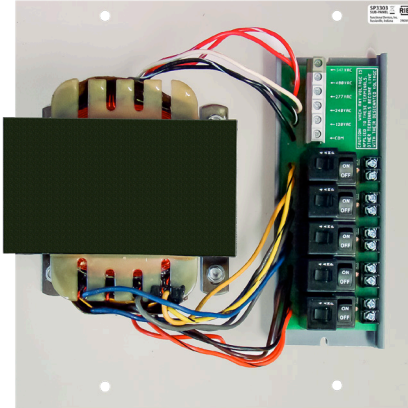


AC POWER SUPPLY

PSMN200A

200 VA Power Supply, Five 40 VA Class 2 Outputs, 480/347/277/240/120 Vac to 24 Vac, Polymetal Subpanel Pre-Mounted

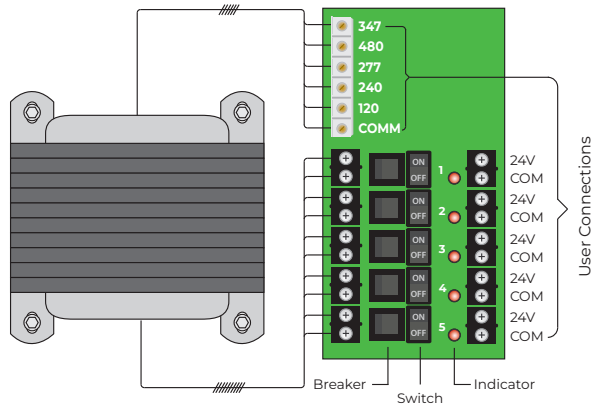

- **347 VAC INPUT VOLTAGE** PROVIDES DIRECT CONVERSION FROM MANY CANADIAN SYSTEMS TO CLASS 2 OUTPUTS
- PERFECT FOR ISOLATING **UP TO FIVE ZONE CONTROLLERS**

SPECIFICATIONS

Transformer	One (1) 200 VA
Over Current Protection	Circuit Breaker
Primary	480/347/277/240/120 Vac
Frequency	50/60 Hz
24 Vac ON/OFF	On / Off Switch & Breaker
5 Secondaries	24 Vac, with LED Indicators
Input	480/347/277/240/120 Vac Finger-Safe Terminals , 8-18 AWG
Output	5 Ungrounded, Isolated, 40 VA, Class 2, 24 Vac Outputs. Terminals accept 12-26 AWG wire.
Ambient Temperature Derating	1.6A up to 40° C ; 1.2A up to 60° C (When All 5 Outputs Operated Simultaneously) • With 120 Vac primary input voltage • When all 5 outputs operated simultaneously, at room temperature
Dimensions	11.330" H x 11.400" W x 5.000" D
Approvals	Class 2 (UL Approved UL5085-3), UL916, C-UL, CE, RoHS

Standby Wattage	18.93 W @ 120 Vac 22.08 W @ 240 Vac 22.33 W @ 277 Vac 23.11 W @ 347 Vac 25.24 W @ 480 Vac
Full Load Primary Current	2.57 A @ 120 Vac 1.44 A @ 240 Vac 1.17 A @ 277 Vac 0.95 A @ 347 Vac 0.73 A @ 480 Vac
Secondary Output Voltage vs. Load	24.9 V @ 0.5 Amp 24.0 V @ 1.0 Amp 23.9 V @ 1.4 Amp 23.7 V @ 1.6 Amp
Sub-Panel Origin	Plenum Rated Polymetal Made of US and non-US parts

NOTE

Primary voltage terminal cover available