


AC TRANSDUCERS

RIBXKTV SERIES

Current Transducers, Solid Core, Up to 100 Amps Sensing Range, 0-5 Vdc Terminal Strip Sensor Output

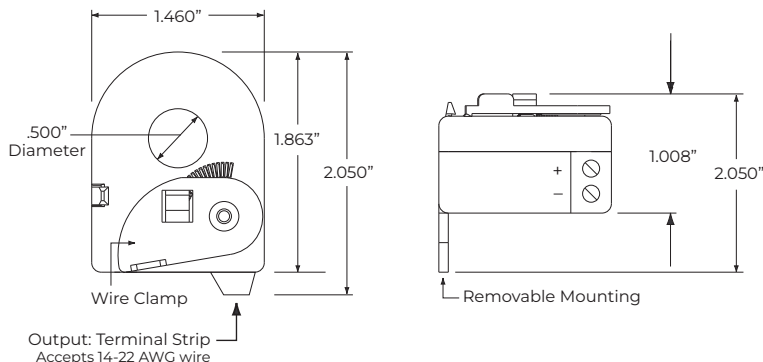

SPECIFICATIONS

Operating Temperature	-30 to 140 ° F
Humidity Range	5 to 95% (noncondensing)
Accuracy	96.8% Full Scale
Max Sense Voltage	600 Vac
Sensor Type	Solid core with voltage output
Origin	Made of US and non-US parts
Approvals	UL Listed, UL916, UL864, California State Fire Marshal, C-UL, CE, RoHS
Mounting / Installation	Removable mounting tab provided. The wire clamp locks against the wire being monitored, securing the unit in place.

SELECTION GUIDE

Model #	Sensing Range	Sensor Output	Loading
RIBXKTV5-10	0-10 Amps	0-5 Vdc (Terminal Strip, Accepts #14-22 AWG Wire)	1% Error @ 180 kΩ
RIBXKTV5-20	0-20 Amps	0-5 Vdc (Terminal Strip, Accepts #14-22 AWG Wire)	1% Error @ 90 kΩ
RIBXKTV5-50	0-50 Amps	0-5 Vdc (Terminal Strip, Accepts #14-22 AWG Wire)	1% Error @ 40 kΩ
RIBXKTV5-100	0-100 Amps	0-5 Vdc (Terminal Strip, Accepts #14-22 AWG Wire)	1% Error @ 15 kΩ