

TRANSFORMER


TR50VA008

 $Transformer 50 \ VA, 480/277/240/208 \ to \ 120 \ Vac, Circuit \ Breaker, Foot \ and \ Dual \ Threaded \ Hub \ Mount$







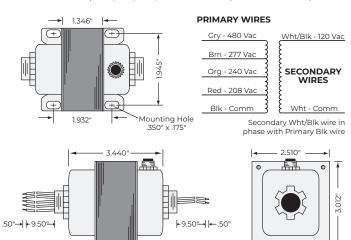



SPECIFICATIONS

| VA Rating | 50 |
|-------------------------|---------------------------|
| Frequency | 50/60 Hz |
| Mounting | Foot & Dual Threaded Hubs |
| Over Current Protection | Circuit Breaker |
| Operating Temperature | -30 to 140° F |

2.523"

| Dimensions | 3.440" x 2.510" x 3.012" (w/ .500" NPT Hubs) | |
|--------------|--|--|
| Wire Length | 9.5" Typical w/ .5" Strip | |
| MTBF | 100,000 Hours @ 77° F | |
| Construction | Split-Bobbin | |
| Approvals | UL5085-2 Listed General Purpose, US / Canada, CE, RoHS | |