


## TRANSFORMER



### TR75VA004

Transformer 75 VA, 480/240/208/120 to 24 Vac, Circuit Breaker, Foot and Single Threaded Hub Mount and Side Opening

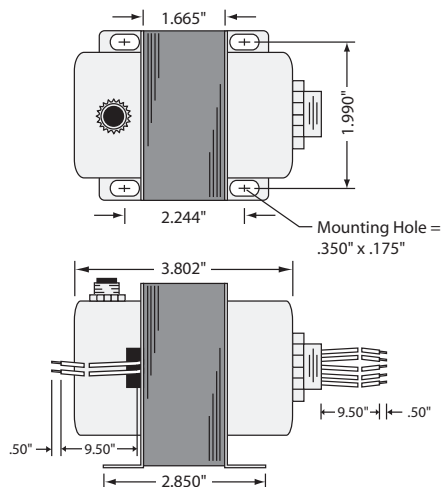

PRIMARY WIRES	SECONDARY WIRES
Gry - 480 Vac	Yel/Wht - 24 Vac
Org - 240 Vac	
Red - 208 Vac	
Wht - 120 Vac	
Blk - Comm	Yel - Comm

Secondary Yel/Wht wire in phase with Primary Blk wire.

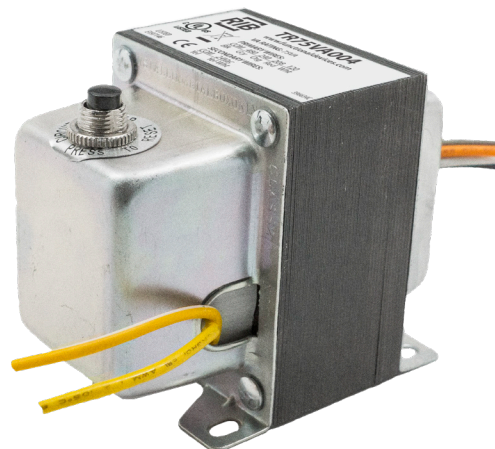

## SPECIFICATIONS

**VA Rating:** 75  
**Frequency:** 50/60 Hz  
**Mounting:** Foot & Single Threaded Hub  
**Over Current Protection:** Circuit Breaker  
**Operating Temperature:** -30 to 140° F

**Dimensions:** 3.802" x 2.515" x 3.050" (w/ .500" NPT Hub)  
**Wire Length:** 9.5" Typical w/ .5" Strip  
**MTBF:** 100,000 Hours @ 77° F  
**Construction:** Split-Bobbin  
**Approvals:** Class 2 UL5085-3 Listed, C-UL, CE, RoHS