
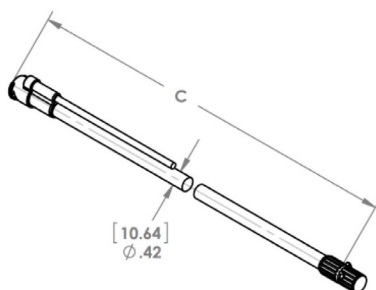


CURRENT TRANSFORMERS

ROPE SERIES

4000, 6000, 8000, and 10,000 Amp Revenue Grade Rogowski Coil Current Transformers with 70mV Output



SPECIFICATIONS

Environment	Indoor Use Only 5 to 176° F (-15 to 80°C) 90% relative humidity	Accuracy	0.75% (typical)
Wires	6' , 24 AWG, 600V Rated	Linearity	10%-120%
Phase Direction	Arrow points toward Load	Polarity	Red-Hi, Black-Low
Secondary Output	175mV per 1KA AC @ 60 Hz (unburdened)	Frequency Range	20-400 Hz
		Max Sense Voltage	600 Vac
		Approvals	ETL Listed, CE, RoHS

SELECTION GUIDE

Model #	Primary Input	Dimension A	Dimension B	Dimension C	Ratio	Accuracy (%)
ROPE16-040A-07MV	4,000	5.00"	5.80"	16.00"	4,000/70mV	0.75
ROPE24-060A-07MV	6,000	7.60"	8.40"	24.00"	6,000/70mV	0.75
ROPE36-080A-07MV	8,000	11.50"	12.30"	36.00"	8,000/70mV	0.75
ROPE48-100A-07MV	10,000	15.3"	6.10"	48.00"	10,000/70mV	0.75